

LIFTING PERFORMANCE



Standard 9’ 11” Boom

Standard 5’ 7” Stick

Standard 16” Track Shoes

No Bucket

Ratings are based on ISO 10567:2007. Lift capacity does not exceed 75% of tipping load with the machine on firm, level ground or 87% of hydraulic lifting capacity.

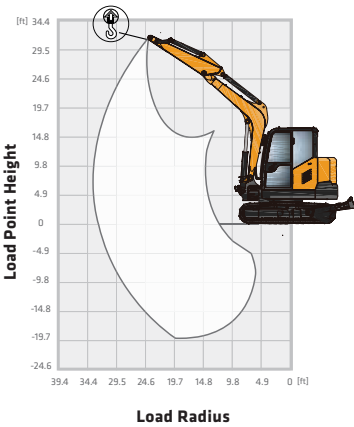

Blade Up

B (HEIGHT)	6.6 FT		9.8 FT		13.1 FT		16.4 FT		MAX	
LOAD POINT HEIGHT										
13.1 ft					*2,535 lbs	*2,535 lbs			2,359 lbs	2,271 lbs
9.8 ft					*2,756 lbs	*2,756 lbs	1,984 lbs	1,896 lbs	1,918 lbs	1,841 lbs
6.6 ft			4,079 lbs	3,726 lbs	2,734 lbs	2,590 lbs	1,940 lbs	1,852 lbs	1,731 lbs	1,653 lbs
3.3 ft			3,968 lbs	3,616 lbs	2,612 lbs	2,447 lbs	1,896 lbs	1,786 lbs	1,664 lbs	1,576 lbs
0.0 ft			3,836 lbs	3,461 lbs	2,524 lbs	2,359 lbs	1,852 lbs	1,742 lbs	1,709 lbs	1,620 lbs
-3.3 ft	*5,997 lbs	*5,997 lbs	3,748 lbs	3,439 lbs	2,469 lbs	2,315 lbs			1,874 lbs	1,786 lbs
-6.6 ft	7,848 lbs	6,680 lbs	3,792 lbs	3,483 lbs	2,502 lbs	2,359 lbs			2,381 lbs	2,249 lbs

Blade Down

B (HEIGHT)	6.6 FT		9.8 FT		13.1 FT		16.4 FT		MAX	
LOAD POINT HEIGHT										
13.1 ft					*2,535 lbs	*2,535 lbs			*2,469 lbs	2,271 lbs
9.8 ft					*2,756 lbs	*2,756 lbs	*2,866 lbs	1,896 lbs	*2,337 lbs	1,841 lbs
6.6 ft			*4,453 lbs	3,726 lbs	*3,417 lbs	2,590 lbs	*3,064 lbs	1,852 lbs	*2,381 lbs	1,653 lbs
3.3 ft			*6,371 lbs	3,616 lbs	*4,211 lbs	2,447 lbs	*3,395 lbs	1,786 lbs	*2,535 lbs	1,576 lbs
0.0 ft			*7,253 lbs	3,461 lbs	*4,762 lbs	2,359 lbs	*3,638 lbs	1,742 lbs	*2,910 lbs	1,620 lbs
-3.3 ft	*5,997 lbs	*5,997 lbs	*7,187 lbs	3,439 lbs	*4,872 lbs	2,315 lbs			*3,660 lbs	1,786 lbs
-6.6 ft	*8,818 lbs	6,680 lbs	*6,349 lbs	3,483 lbs	*4,233 lbs	2,359 lbs			*3,968 lbs	2,249 lbs